

# Magnetic Contact

## Part No. LC-25

### Description

Magnetic contact is a proximity switch what is used magnetic field of magnet to actuate Reed Switch. Because of design in Reed Switch, low cost and simple using-way is major characteristics of magnetic contact.


### Application

- Security equipment
- domestic appliances
- automation machines

### Feature

- Recessed steel door switch set

### Outline dimensions

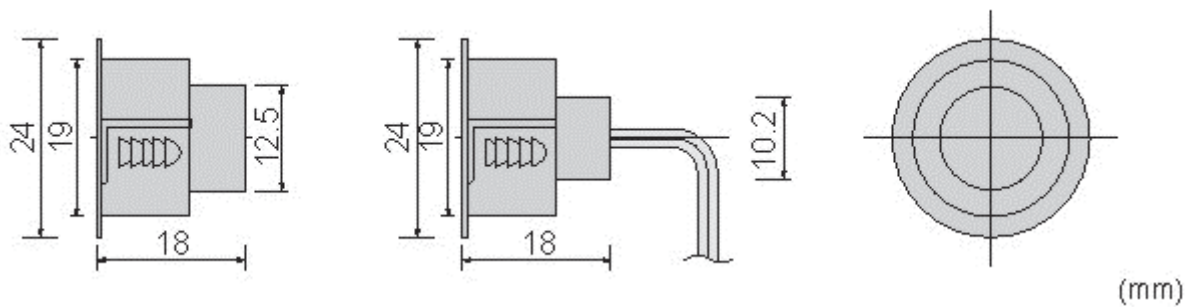

## Magnetic Contact

### Part No. LC-25

#### Switch

Contact arrangement	Closed loop
Switching voltage (Max.)	100v AC/DC
Switching current (Max.)	0.5 A
Contact capacity (Max.)	10 VA
Initial contact (Max.)	0.2 Ohm
Carry current (Max.)	1 A
Breakdown voltage	200 VDC
Insulation resistance (Min.)	100 Mohm
Switch cycle	5×10 <sup>7</sup> cycle at 30V 0.1ADC

#### Magnet

Material	NdFeB rare earth
Residual flux density (Br)	11.8~12.5 KGauss
Maximun energy product (BH)	33~36 MG.Oe
Curie temperature (Tc)	310℃

#### Gap

Sense gap (Min.)	23mm
------------------	------

#### Physical characteristic

Temperature	-20℃ ~+60℃
Vibration	20 G(10~55 HZ)
Shock	30 G (11 msec)
Heat shock	-25℃ ~+65℃ (30Min.) (30Min.) 100 cycle
Package drop	Drop height 80 cm
Humidity	80℃ 95% RH 72 hrs