

Reflective Object Sensor

Model No: LBR-123S

Description

The **LBR-123S** is a light reflection switch that includes a GaAs IRLED transmitter and a NPN photo-transistor with a high photosensitive receiver for short distance, operating in the infrared range. Both components are mounted side-by-side in a plastic package.


Features

- Fast response time
- High sensitivity
- Cutting wavelength $\lambda = 840\text{nm}$
- Thin
- Compact

Applications

- Camera
- VCR
- Floppy disk driver
- Cassette type recorder
- Various microcomputer control equipment

Outline dimensions

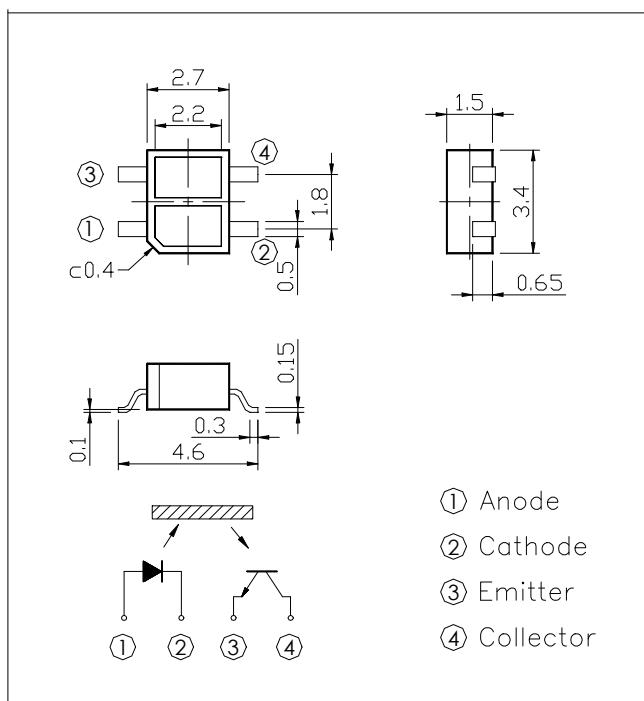

Reflective Object Sensor

Model No: LBR-123S

Absolute Maximum Ratings (Ambient Temperature: 25°C)












Item	Symbol	Rating	Units	Note
Input	Forward current	I _F	50	mA
	Reverse voltage	V _R	5	V
	Peak forward current	I _{FP}	1	A
	Power dissipation	P _d	75	mW
Output	Collector current	I _c	50	mA
	Collector-Emitter voltage	BV _{ceo}	30	V
	Emitter-Collector voltage	BV _{eco}	5	V
	Collector power dissipation	P _c	75	mW
Storage Temperature	T _{stg}	-40 to +85	°C	
Operating Temperature	T _{op}	-25 to +85	°C	
Soldering Temperature	T _{sol}	260	°C	10 seconds max.

Electrical Specifications (Ambient Temperature: 25°C)

Item	Symbol	MIN.	TYP.	MAX.	Units	Conditions
Input	Forward voltage	V _F		1.2	1.6	V IF=20mA
	Reverse current	I _R		10	μA	VR=5V
	Peak wavelength	λ _p		940	nm	IF=20mA
	View angle	2θ 1/2		110	Deg.	IF=20mA
Output	Dark current	I _{ceo}		1	μA	V _{ce} =10V
	C-E saturation voltage	V _{ce(sat)}		0.4	V	I _c =2mA, I _B =0.1mA
Light current	I _{c(on)}	0.15			mA	V _{ce} =5V IF=20mA
Leakage current	I _{Leak}			1	μA	
Speed	Rise Time	tr		20	μs	V _{ce} =2V I _C =10mA R _L =100 , d=1mm
	Fall Time	tf		20		

Reflective Object Sensor

Reference Data

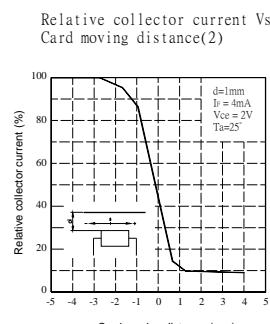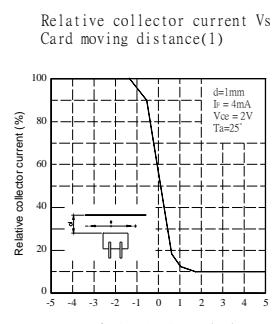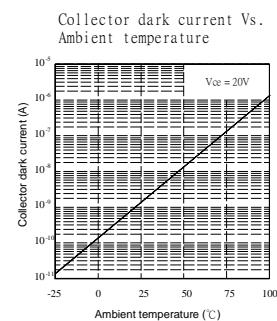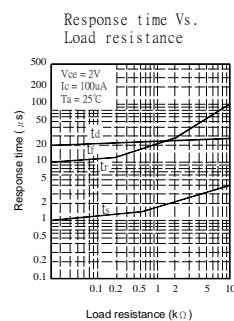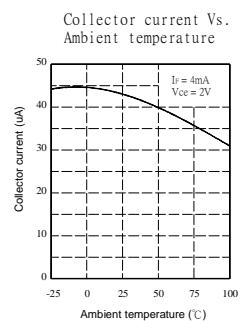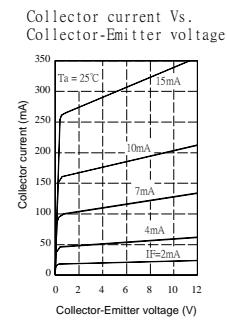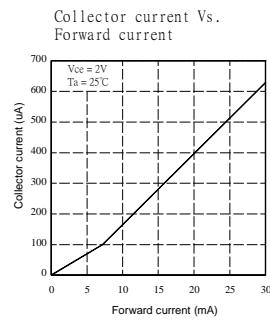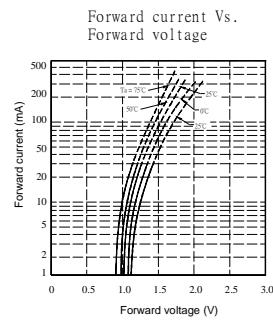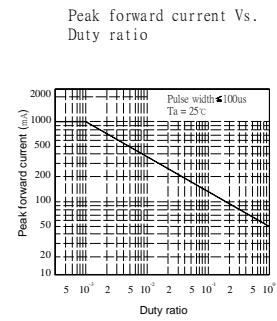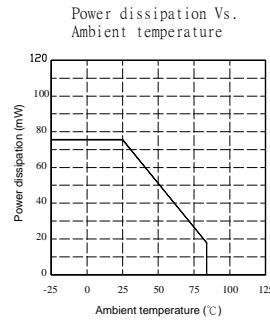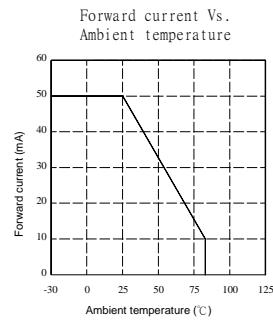

Test circuit for response time

